


Revolution 360 - Centrifugal Single-inlet Forward Curved Single Inlet 200-75mm

Technical Data

| | |
|------------------------------|------------|
| Supply (V/Ph/Hz) | // |
| Max Airflow (m³/h) | 552 |
| Max Current (A) | 0.63 |
| Max Input Power (W) | 61 |
| Max Speed (rpm) | 1400 |
| ErP Efficiency Rating (FMEG) | 59 |
| Ip Rating | 54 |
| Motor Insulation Class | B |
| Temperature Range (°C) | -20 to +50 |
| Weight (KG) | 4.55 |


Performance Data

| Data Point | Static Pressure (pa) | Airflow (m³/h) | Current (A) | Speed (rpm) | Power (W) |
|------------|----------------------|----------------|-------------|-------------|-----------|
| 1 | 252 | 0 | 0.26 | 1400 | 20 |
| 2 | 204 | 200 | 0.40 | 1293 | 33 |
| 3 | 163 | 398 | 0.57 | 1138 | 54 |
| 4 | 88 | 499 | 0.61 | 964 | 59 |
| 5 | 0 | 552 | 0.56 | 781 | 52 |

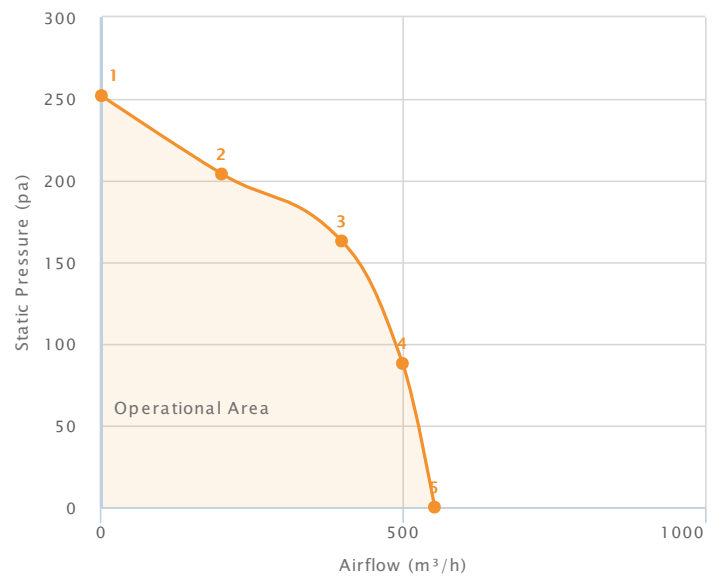

■ Tested in accordance with ISO 5801
■ Installation type method - type A

Dimensions

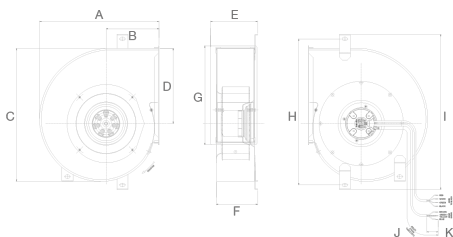

| | | | |
|---|-------|---|-----|
| A | 326.4 | G | 270 |
| B | 144.8 | H | 398 |
| C | 362.9 | I | 423 |
| D | 205.2 | J | 600 |
| E | 129.2 | K | 30 |
| F | 113.2 | L | |