


## Revolution 360 - Centrifugal Double-inlet Forward Curved Double Inlet 160-204mm

### Technical Data

Supply (V/Ph/Hz)	230 / 1 / 50/60
Max Airflow (m³/h)	951
Max Current (A)	0.86
Max Input Power (W)	95
Max Speed (rpm)	1930
ErP Efficiency Rating (FMEG)	56
Ip Rating	54
Motor Insulation Class	B
Temperature Range (°C)	-20 to +45
Weight (KG)	3.9


### Performance Data

Data Point	Static Pressure (pa)	Airflow (m³/h)	Current (A)	Speed (rpm)	Power (W)
1	357	0	0.59	1910	58
2	302	194	0.63	1845	63
3	212	418	0.66	1550	68
4	91	741	0.75	1176	80
5	0	951	0.86	950	95

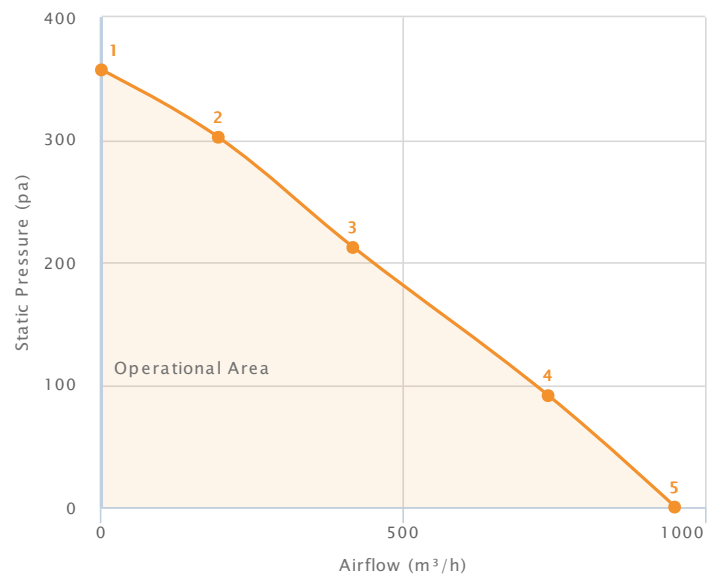

- Tested in accordance with ISO 5801
- Installation type method - type A

### Dimensions

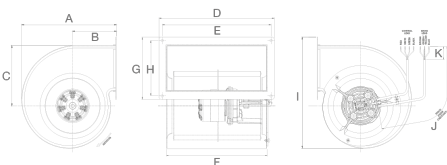

A	220.9	G	145
B	102	H	129
C	140	I	258.7
D	270	J	600
E	254	K	30
F	234.5	L	

General Enquiries  
+44 (0) 1793 524 291

Tech Support  
+44 (0) 1793 524 291

Sales Support  
+44 (0) 1793 640 554

[www.torin-sifan.com](http://www.torin-sifan.com)

**torin-sifan**  
The Partner of Choice