




EC/DC Combustion Fans DSB126-15 HV (EC) 230 V

Technical Data

| | |
|------------------------------|-----------------|
| Supply (V/Ph/Hz) | 230 / 1 / 50/60 |
| Max Airflow (m³/h) | 102 |
| Max Current (A) | 0.47 |
| Max Input Power (W) | 58 |
| Max Speed (rpm) | 6800 |
| ErP Efficiency Rating (FMEG) | Out of Scope |
| Ip Rating | 00 |
| Motor Insulation Class | B |
| Temperature Range (°C) | -10 to +75 |
| Weight (KG) | 1.3 |

Performance Data

| Data Point | Static Pressure (pa) | Airflow (m³/h) | Current (A) | Speed (rpm) | Power (W) |
|------------|----------------------|----------------|-------------|-------------|-----------|
| 1 | 1788 | 0 | 0.35 | 6844 | 40 |
| 2 | 1395 | 38 | 0.41 | 6150 | 51 |
| 3 | 790 | 81 | 0.46 | 5300 | 58 |
| 4 | 405 | 91 | 0.44 | 4897 | 55 |
| 5 | 0 | 102 | 0.42 | 4493 | 52 |

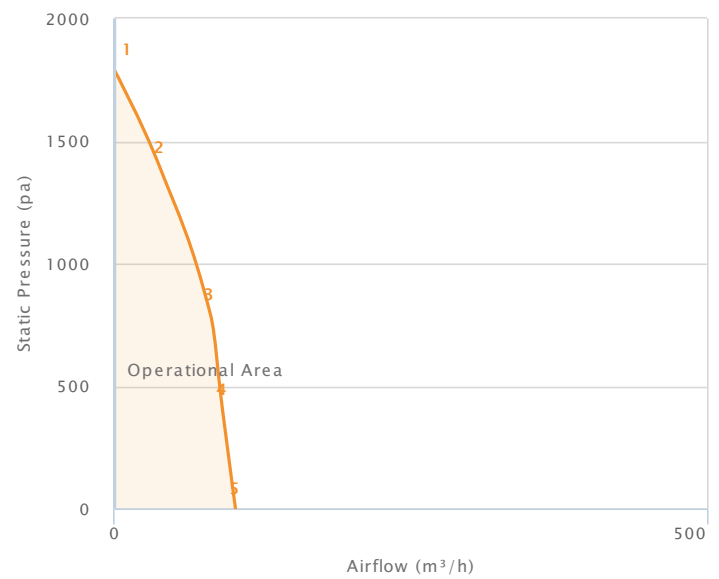

■ Tested in accordance with ISO 5801
■ Installation type method - type A

| | | | |
|---|------|---|-------|
| A | 75 | G | 98.8 |
| B | 69.1 | H | 22 |
| C | 54.7 | I | 173.9 |
| D | 28.7 | J | 87.3 |
| E | 59.8 | K | 96.5 |
| F | 22 | L | 172.9 |

| | | | |
|---|------|---|-------|
| A | 75 | G | 98.8 |
| B | 69.1 | H | 22 |
| C | 54.7 | I | 173.9 |
| D | 28.7 | J | 87.3 |
| E | 59.8 | K | 96.5 |
| F | 22 | L | 172.9 |

Dimensions

| | | | |
|---|------|---|-------|
| A | 75 | G | 98.8 |
| B | 69.1 | H | 22 |
| C | 54.7 | I | 173.9 |
| D | 28.7 | J | 87.3 |
| E | 59.8 | K | 96.5 |
| F | 22 | L | 172.9 |

General Enquiries
+44 (0) 1793 524 291

Tech Support
+44 (0) 1793 524 291

Sales Support
+44 (0) 1793 640 554

www.torin-sifan.com

torin-sifan
The Partner of Choice