


## Twin EC Fandecks Twin EC Fandeck 160-222

### Technical Data

Supply (V/Ph/Hz)	230 / 1 / 50/60
Max Airflow (m <sup>3</sup> /h)	1907
Max Current (A)	2
Max Input Power (W)	260
Max Speed (rpm)	1550
ErP Efficiency Rating (FMEG)	Out of Scope
Ip Rating	20
Motor Insulation Class	F
Temperature Range (°C)	-20 to +50
Weight (KG)	TBC

### Performance Data

Data Point	Static Pressure (pa)	Airflow (m <sup>3</sup> /h)	Current (A)	Speed (rpm)	Power (W)
1	250	0	0.52	1560	71
2	203	239	0.58	1560	76
3	152	1284	1.62	1562	209
4	51	1795	1.96	1420	259
5	0	1907	1.92	1325	254

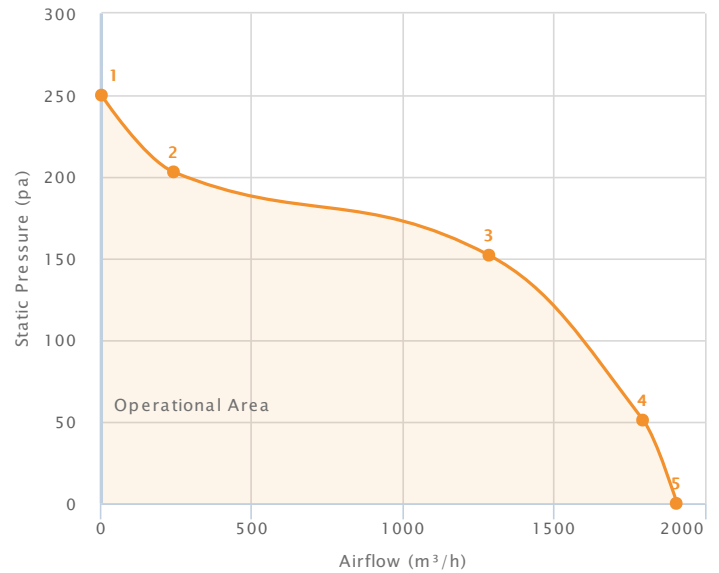

- Tested in accordance with ISO 5801
- Installation type method - type A

### Dimensions

A	776	G	223.5
B	250.8	H	110.6
C	204.2	I	244.5
D	190	J	47.2
E	83	K	
F	115	L	

**General Enquiries**  
+44 (0) 1793 524 291

**Tech Support**  
+44 (0) 1793 524 291

**Sales Support**  
+44 (0) 1793 640 554

[www.torin-sifan.com](http://www.torin-sifan.com)

**torin-sifan**  
The Partner of Choice