




## Triple EC Fandecks Triple EC Fandeck 133-178

### Technical Data

Supply (V/Ph/Hz)	230 / 1 / 50/60
Max Airflow (m³/h)	2304
Max Current (A)	1.8
Max Input Power (W)	260
Max Speed (rpm)	1550
ErP Efficiency Rating (FMEG)	Out of Scope
Ip Rating	20
Motor Insulation Class	F
Temperature Range (°C)	-20 to +40
Weight (KG)	TBC



### Performance Data

Data Point	Static Pressure (pa)	Airflow (m³/h)	Current (A)	Speed (rpm)	Power (W)
1	147	0	0.44	1535	55
2	121	643	0.65	1534	81
3	98	1503	1.20	1535	160
4	66	1892	1.56	1536	212
5	0	2304	1.80	1412	244

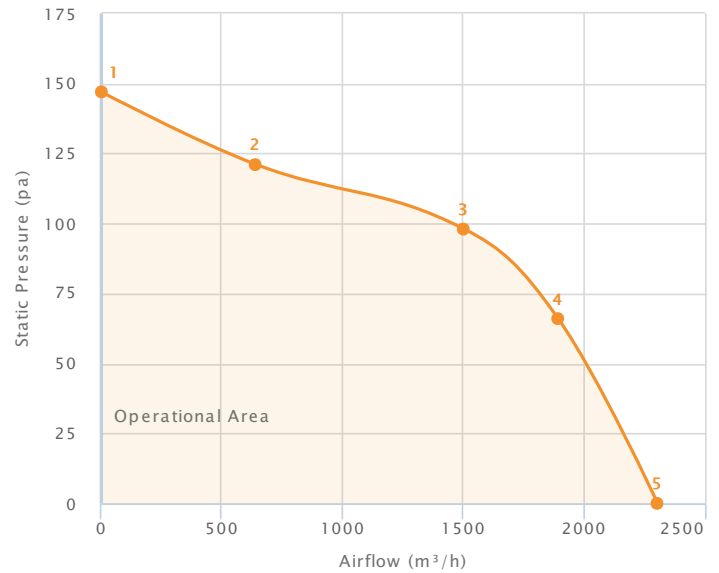

- Tested in accordance with ISO 5801
- Installation type method - type A

### Dimensions

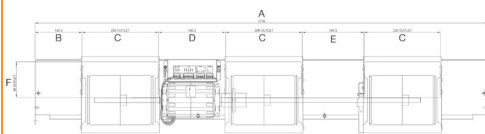

Dimensions			
A	1218	G	95
B	126.5	H	109
C	206	I	190.5
D	180.5	J	205.6
E	166.5	K	175
F	96	L	129

Dimensions			
A	1218	G	95
B	126.5	H	109
C	206	I	190.5
D	180.5	J	205.6
E	166.5	K	175
F	96	L	129

A	1218	G	95
B	126.5	H	109
C	206	I	190.5
D	180.5	J	205.6
E	166.5	K	175
F	96	L	129

**General Enquiries**  
+44 (0) 1793 524 291

**Tech Support**  
+44 (0) 1793 524 291

**Sales Support**  
+44 (0) 1793 640 554

[www.torin-sifan.com](http://www.torin-sifan.com)

**torin-sifan**  
The Partner of Choice