


## Quad EC Fandecks Quad EC Fandeck 146-222

### Technical Data


Supply (V/Ph/Hz)	230 / 1 / 50/60
Max Airflow (m³/h)	3870
Max Current (A)	3.45
Max Input Power (W)	473
Max Speed (rpm)	1550
ErP Efficiency Rating (FMEG)	44
Ip Rating	20
Mbtor Insulation Class	F
Temperature Range (°C)	-20 to +50
Weight (KG)	TBC

### Performance Data

Data Point	Static Pressure (pa)	Airflow (m³/h)	Current (A)	Speed (rpm)	Power (W)
1	185	0	1.01	1532	120
2	157	973	1.39	1534	169
3	132	2065	2.34	1536	305
4	93	2962	3.02	1524	408
5	0	3870	3.43	1366	473

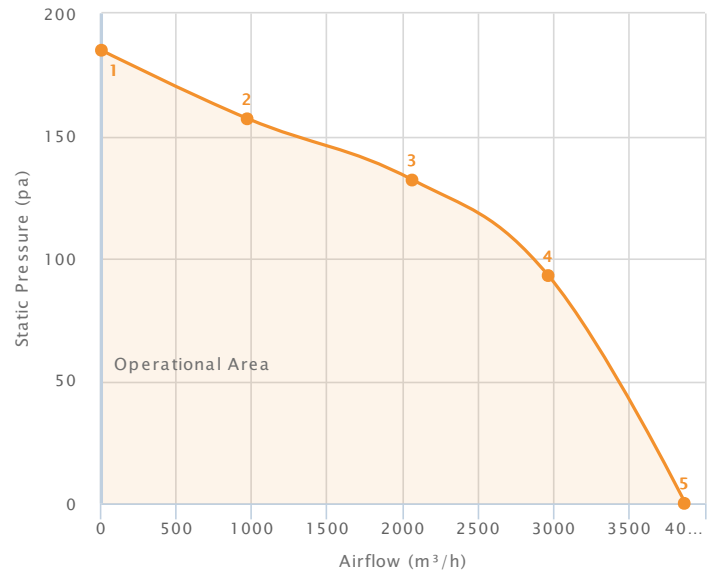

- Tested in accordance with ISO 5801
- Installation type method - type A

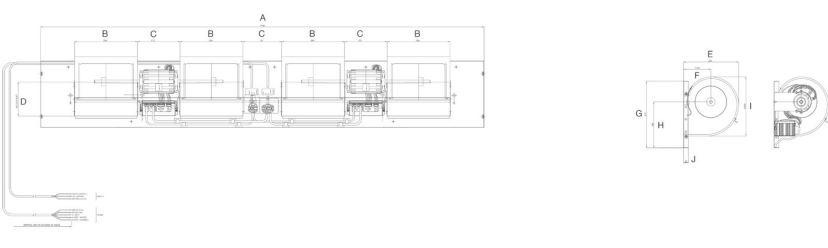

A	1792	G	270
B	254	H	186
C	172	I	239.6
D	137	J	20
E	223	K	
F	110.6	L	

A	1792	G	270
B	254	H	186
C	172	I	239.6
D	137	J	20
E	223	K	
F	110.6	L	

### Dimensions

A	1792	G	270
B	254	H	186
C	172	I	239.6
D	137	J	20
E	223	K	
F	110.6	L	

**General Enquiries**  
+44 (0) 1793 524 291

**Tech Support**  
+44 (0) 1793 524 291

**Sales Support**  
+44 (0) 1793 640 554

[www.torin-sifan.com](http://www.torin-sifan.com)

**torin-sifan**  
The Partner of Choice