


High Efficiency EC Direct Drive Fans (Standard) ECDDC 201-178 (7/7)

Technical Data

| | |
|------------------------------|--------------|
| Supply (V/Ph/Hz) | 230 / 1 / 50 |
| Max Airflow (m³/h) | 2414 |
| Max Current (A) | 2.44 |
| Max Input Power (W) | 540 |
| Max Speed (rpm) | 1559 |
| ErP Efficiency Rating (FMEG) | 49 |
| Ip Rating | 20 |
| Motor Insulation Class | F |
| Temperature Range (°C) | -20 to +40 |
| Weight (KG) | 10.5 |

Performance Data

| Data Point | Static Pressure (pa) | Airflow (m³/h) | Current (A) | Speed (rpm) | Power (W) |
|------------|----------------------|----------------|-------------|-------------|-----------|
| 1 | 353 | 0.00 | 0.64 | 1556 | 121 |
| 2 | 314 | 516 | 0.79 | 1556 | 159 |
| 3 | 260 | 1533 | 1.64 | 1558 | 360 |
| 4 | 134 | 2182 | 2.42 | 1559 | 540 |
| 5 | 0.00 | 2414 | 2.44 | 1432 | 540 |

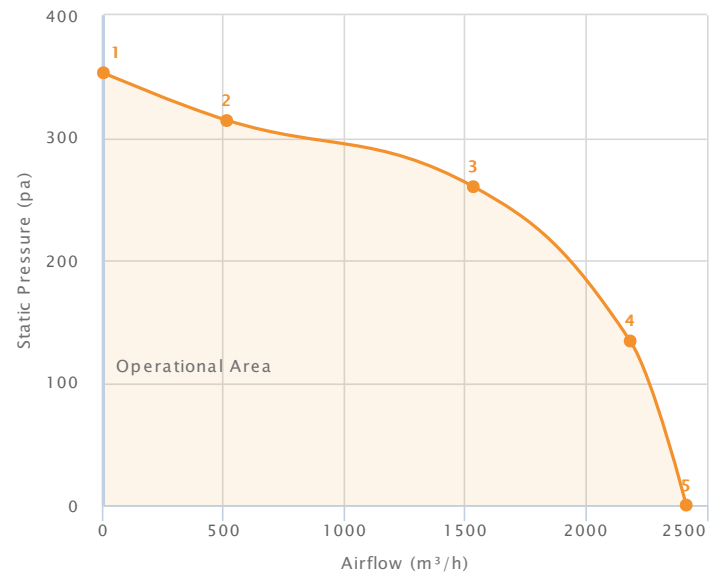

■ Tested in accordance with ISO 5801
■ Installation type method - type A

Dimensions

| | |
|-------|-------|
| A 309 | G 272 |
| B 148 | H 265 |
| C 322 | I 241 |
| D 180 | J 232 |
| E 165 | K 54 |
| F 296 | L 419 |