




## Revolution 360 - Centrifugal Double-inlet Forward Curved Double Inlet 146-180mm Tight

### Technical Data

Supply (V/Ph/Hz)	230 / 1 / 50/60
Max Airflow (m³/h)	860
Max Current (A)	0.8
Max Input Power (W)	83
Max Speed (rpm)	2450
ErP Efficiency Rating (FMEG)	55
Ip Rating	54
Motor Insulation Class	B
Temperature Range (°C)	-20 to +50
Weight (KG)	3.4


### Performance Data

Data Point	Static Pressure (pa)	Airflow (m³/h)	Current (A)	Speed (rpm)	Power (W)
1	346	0	0.55	2450	52
2	296	200	0.63	2274	62
3	182	454	0.67	1750	67
4	81	706	0.73	1364	75
5	0	860	0.79	1145	83

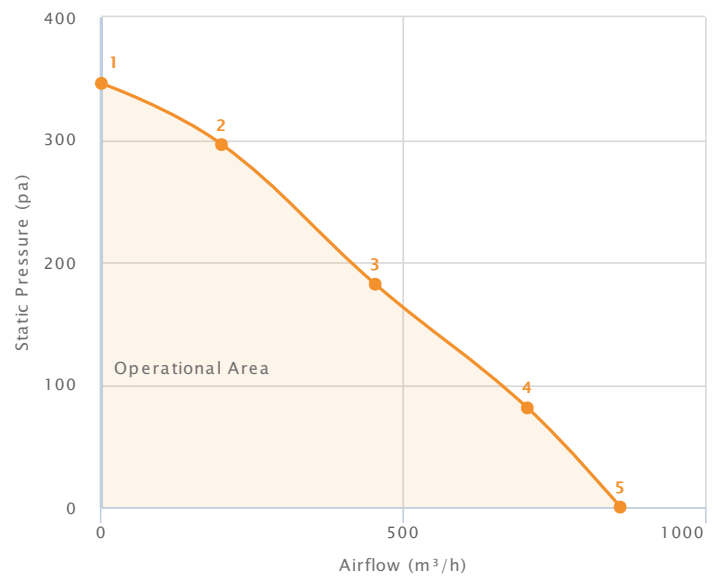

■ Tested in accordance with ISO 5801  
■ Installation type method - type A

### Dimensions

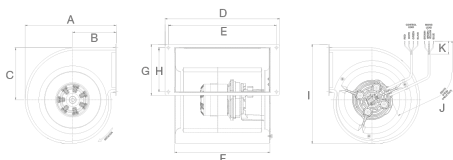

A	207.9	G	116
B	99.2	H	100
C	118.3	I	225
D	262	J	600
E	247	K	30
F	217.4	L	