


## Revolution 360 - High Efficiency EC Backward Curved EC Backward Curved - 225mm (90w) - In cassette frame

### Technical Data


Supply (V/Ph/Hz)	198 to 264 //
Max Airflow (m³/h)	662
Max Current (A)	0.69
Max Input Power (W)	82
Max Speed (rpm)	2515
ErP Efficiency Rating (FMEG)	74
Ip Rating	54
Motor Insulation Class	B
Temperature Range (°C)	-20 to +60
Weight (KG)	2.1

### Performance Data

Data Point	Static Pressure (pa)	Airflow (m³/h)	Current (A)	Speed (rpm)	Power (W)
1	462	0	0.38	2524	45
2	409	258	0.68	2466	82
3	245	495	0.68	2458	82
4	123	601	0.61	2523	72
5	0	662	0.45	2522	52

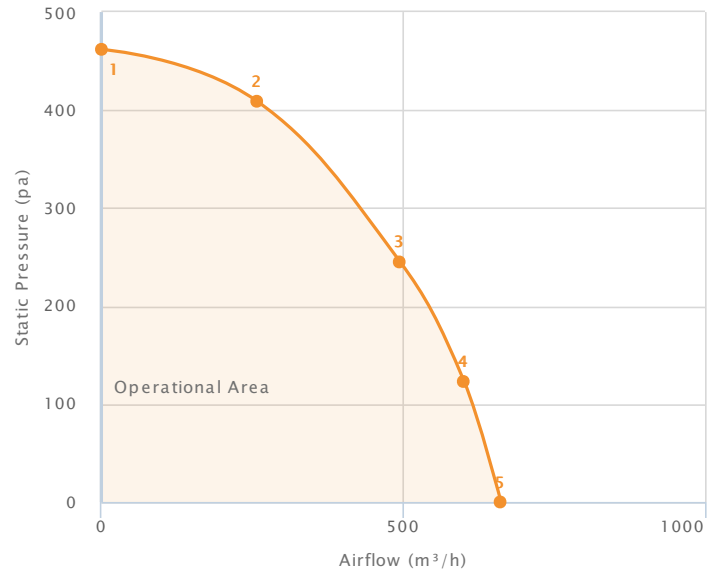

- Tested in accordance with ISO 5801
- Installation type method - type A

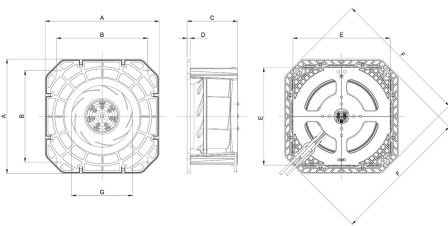

### Dimensions

A	270	G	145
B	215.7	H	
C	119	I	
D	7	J	
E	230	K	
F	325	L	

**General Enquiries**  
+44 (0) 1793 524 291

**Tech Support**  
+44 (0) 1793 524 291

**Sales Support**  
+44 (0) 1793 640 554

[www.torin-sifan.com](http://www.torin-sifan.com)

**torin-sifan**  
The Partner of Choice